


# IB IL 24 DI 8 IB IL 24 DI 8-PAC

## Inline Terminal With Eight Digital Inputs

Data Sheet 555204

06/2003

5552A001



This data sheet is only valid in association with the IB IL SYS PRO UM E User Manual or the Inline System Manual for your bus system.



The item versions IB IL 24 DI 8 and IB IL 24 DI 8-PAC only differ with regard to the standard supplied with the module (see "Ordering Data" on page 10). Function and technical data are identical.


In the following, for greater clarity, we will only use the item designation IB IL 24 DI 8.

## Function

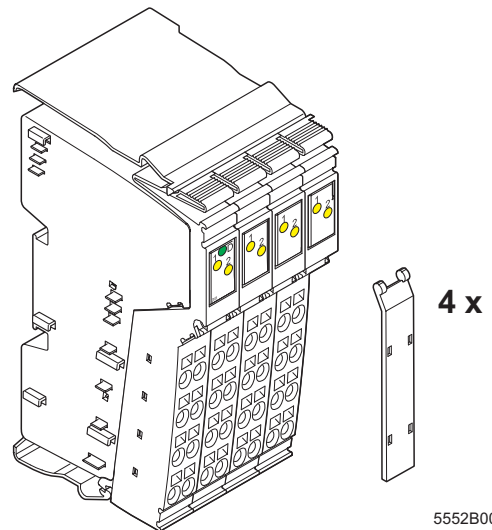The terminal is designed for use within an Inline station. It is used to acquire digital input signals.

## Features

- Connections for eight digital sensors
- Connection of sensors in 2, 3, and 4-wire technology
- Maximum permissible load current per sensor: 250 mA
- Maximum permissible load current from the terminal: 2.0 A
- Diagnostic and status indicators



5552B006

Figure 1 IB IL 24 DI 8-PAC terminal

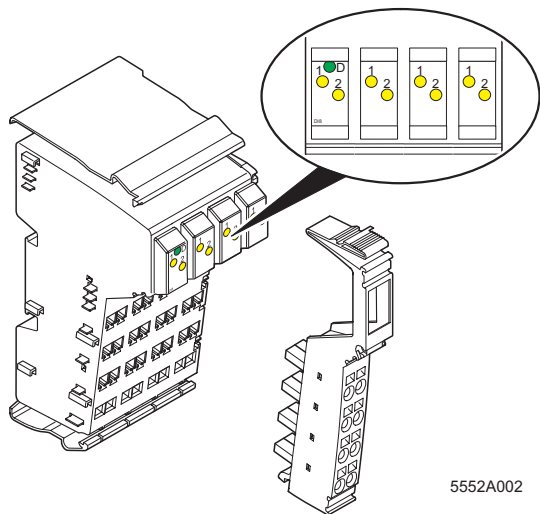


Figure 2 IB IL 24 DI 8 terminal with an appropriate connector

Local Diagnostic and Status Indicators

Des.	Color	Meaning
D	Green	Diagnostics
<b>Each connector</b>		
1, 2	Yellow	Status indicators of the inputs

Terminal Assignment for Each Connector

Terminal Point	Assignment
1.1	Signal input (IN1)
2.1	Signal input (IN2)
1.2, 2.2	Segment voltage $U_S$ for 2, 3, and 4-wire termination
1.3, 2.3	Ground contact (GND) for 3 and 4-wire termination
1.4, 2.4	FE connection for 4-wire termination

Function Identification

Light blue

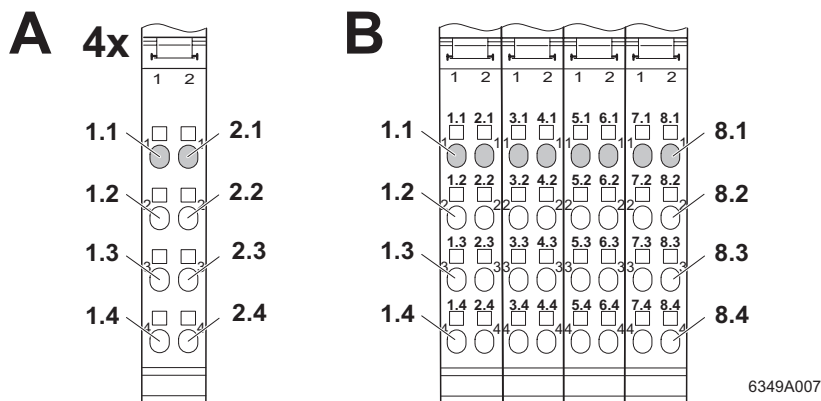


Figure 3 Terminal point numbering when using individual connectors (A) and when using a connector set (B)

# Internal Circuit Diagram

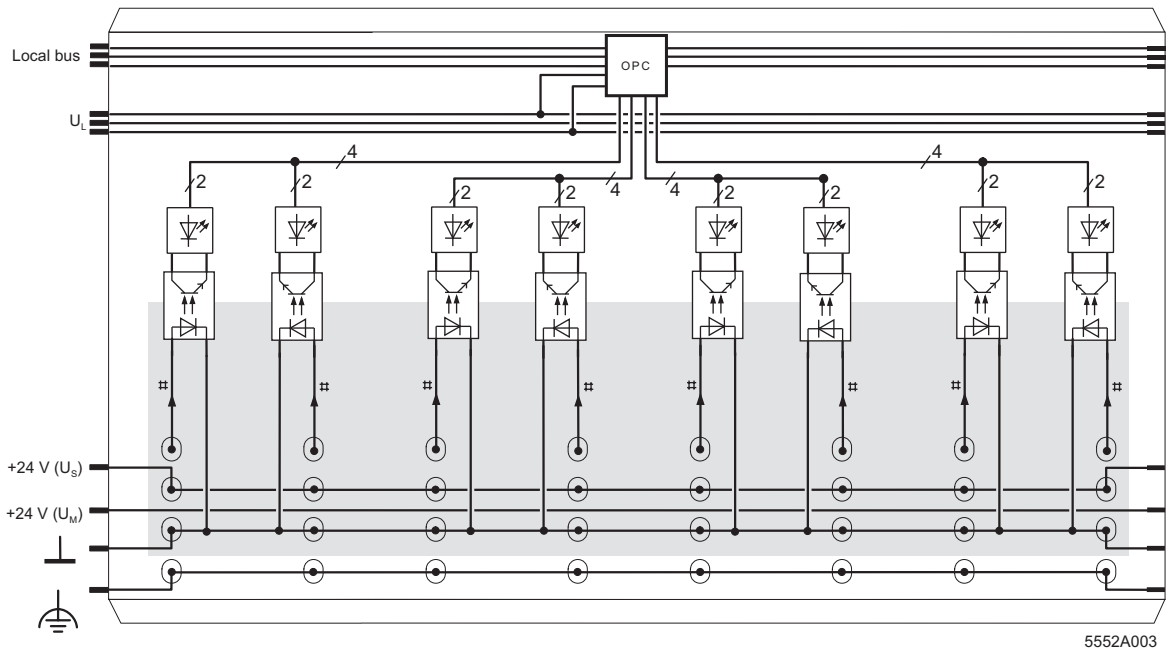







Figure 4 Internal wiring of the terminal points

Key:

-  Protocol chip (bus logic including voltage conditioning)
-  LED
-  Optocoupler
-  Digital input
-  Electrically isolated area




Other symbols are explained in the IB IL SYS PRO UM E User Manual or in the Inline System Manual for your bus system.

## Connection Example



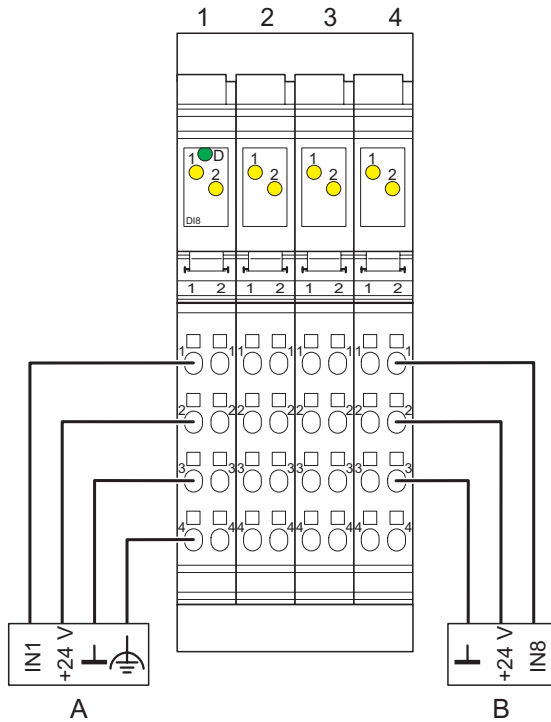When connecting the sensors, observe the assignment of the terminal points to the process data (see page 5).



5552A004

Figure 5 Typical sensor connections

A 4-wire termination

B 3-wire termination

The numbers shown above the module indicate the connector slots.

## Programming Data/ Configuration Data

### INTERBUS

ID code	BE <sub>hex</sub> (190 <sub>dec</sub> )
Length code	81 <sub>hex</sub>
Process data channel	8 bits
Input address area	1 byte
Output address area	0 bytes
Parameter channel (PCP)	0 bytes
Register length (bus)	1 byte

### Other Bus Systems



For programming data / configuration data for other bus systems, please refer to the corresponding electronic device data sheet (GSD, EDS)

## Process Data



Please refer to the data sheet DB GB IBS SYS ADDRESS, Part No. 90 00 99 0, for the assignment of the shown (byte.bit) view to your **INTERBUS** control or computer system.

### Assignment of the Terminal Points to the IN Process Data



The following table applies for IB IL 24 DI 8-PAC terminal with the original connector set and when using the connector sets IB IL DI/DO 8-PLSET and IB IL DI/DO 8-PLSET/CP (see also Figure 3 on page 2, part B).



(Byte.bit) view	Byte	Byte 0							
	Bit	7	6	5	4	3	2	1	0
Terminal	Slot	4		3		2		1	
	<b>Terminal point (signal)</b>	<b>8.1</b>	<b>7.1</b>	<b>6.1</b>	<b>5.1</b>	<b>4.1</b>	<b>3.1</b>	<b>2.1</b>	<b>1.1</b>
	Terminal point (24 V)	8.2	7.2	6.2	5.2	4.2	3.2	2.2	1.2
	Terminal point (GND)	8.3	7.3	6.3	5.3	4.3	3.3	2.3	1.3
	Terminal point (FE )	8.4	7.4	6.4	5.4	4.4	3.4	2.4	1.4
Status indi- cation	Slot	4		3		2		1	
	LED	2	1	2	1	2	1	2	1



The following table applies when using the connectors IB IL SCN-8 or IB IL SCN-8-CP (see also Figure 3 on page 2, part A).

(Byte.bit) view	Byte	Byte 0							
	Bit	7	6	5	4	3	2	1	0
Terminal	Slot	4		3		2		1	
	<b>Terminal point (signal)</b>	<b>2.1</b>	<b>1.1</b>	<b>2.1</b>	<b>1.1</b>	<b>2.1</b>	<b>1.1</b>	<b>2.1</b>	<b>1.1</b>
	Terminal point (24 V)	2.2	1.2	2.2	1.2	2.2	1.2	2.2	1.2
	Terminal point (GND)	2.3	1.3	2.3	1.3	2.3	1.3	2.3	1.3
	Terminal point (FE )	2.4	1.4	2.4	1.4	2.4	1.4	2.4	1.4
Status indi- cation	Slot	4		3		2		1	
	LED	2	1	2	1	2	1	2	1

## Technical Data

General Data	
Order designation (Order No.)	IB IL 24 DI 8 (27 26 22 7) IB IL 24 DI 8-PAC (28 61 24 7)
Housing dimensions (width x height x depth)	48.8 mm x 120 mm x 71.5 mm (1.921 x 4.724 x 2.815 in.)
Weight	118 g (without connectors)
Operating mode	Process data mode with 1 byte
Transmission speed	500 kBaud
Type of sensor connection	2, 3, and 4-wire technology
Permissible temperature (operation)	-25°C to +55°C (-13°F to +131°F)
Permissible temperature (storage/transport)	-25°C to +85°C (-13°F to +185°F)
Permissible humidity (operation)	75% on average, 85% occasionally
 In the range from -25°C to +55°C (-13°F to +131°F) appropriate measures against increased humidity (> 85%) must be taken.	
Permissible humidity (storage/transport)	75% on average, 85% occasionally
 For a short period, slight condensation may appear on the housing if, for example, the terminal is brought into a closed room from a vehicle.	
Permissible air pressure (operation)	80 kPa to 106 kPa (up to 2000 m [6562 ft.] above sea level)
Permissible air pressure (storage/transport)	70 kPa to 106 kPa (up to 3000 m [9843 ft.] above sea level)
Degree of protection	IP 20 according to IEC 60529
Class of protection	Class 3 according to VDE 0106, IEC 60536
Interface	
Local bus	Through data routing

<b>Power Consumption</b>	
Communications power	7.5 V DC
Current consumption from the local bus	50 mA, maximum
Power consumption from the local bus	0.375 W, maximum
Segment supply voltage $U_S$	24 V DC (nominal value)
Nominal current consumption at $U_S$	2 A, maximum

<b>Supply of the Module Electronics and I/O Through Bus Terminal/Power Terminal</b>	
Connection method	Through potential routing

<b>Digital Inputs</b>	
Number	8
Input design	According to EN 61131-2 Type 1
Definition of switching thresholds	
Maximum low level voltage	$U_{Lmax} < 5 \text{ V}$
Minimum high level voltage	$U_{Hmin} > 15 \text{ V}$
Common potentials	Segment supply, ground
Nominal input voltage $U_{IN}$	24 V DC
Permissible range	$-30 \text{ V} < U_{IN} < +30 \text{ V DC}$
Nominal input current at $U_{IN}$	5 mA
Characteristic curve of the current	Linear in the area $1 \text{ V} < U_{IN} < 30 \text{ V}$
Delay time	None
Permissible cable length to the sensor	30 m (98.4 ft.) to ensure conformance with EMC directive 89/336/EEC
Use of AC sensors	AC sensors in the voltage range $< U_{IN}$ are limited in application (corresponding to the input design)

Input Characteristic Curve	
Input voltage (V)	Typical input current (mA)
$-30 < U_{IN} < 0.7$	0
3	0.4
6	1.0
9	1.7
12	2.3
15	3.0
18	3.7
21	4.4
24	5.0
27	5.7
30	6.4

Power Dissipation	
<b>Formula to Calculate the Power Dissipation of the Electronics</b>	
$P_{tot} = 0.375 \text{ W} + \sum_{n=1}^8 \left[ U_{INn} \times \frac{U_{INn} - 1.8 \text{ V}}{4400 \Omega} \right]$	
Where	
$P_{tot}$	Total power dissipation in the terminal
$n$	Index of the number of set inputs $n = 1$ to $8$
$U_{INn}$	Input voltage of the input $n$
<b>Power dissipation of the housing <math>P_{HOU}</math></b>	2.8 W, maximum (within the permissible operating temperature)

Limitation of Simultaneity, Derating	
Derating	No limitation of the simultaneity No derating



Safety Equipment	
Overload in segment circuit	No
Surge voltage	Protective elements of the power terminal
Polarity reversal	Protective elements of the power terminal

**Electrical Isolation/Isolation of the Voltage Areas**



To provide electrical isolation between the logic level and the I/O area, it is necessary to supply the station bus terminal and the digital output terminal described here using the bus terminal or a power terminal from separate power supply units. Interconnection of the 24 V power supplies is not permitted. (See also the User Manual).

**Common Potentials**

24 V main voltage, 24 V segment voltage, and GND have the same potential. FE (functional earth ground) is a separate potential area.


**Separate Potentials in the System Consisting of Bus Terminal/Power Terminal and I/O Terminal**

- Test Distance	- Test Voltage
5 V supply incoming remote bus / 7.5 V supply (bus logic)	500 V AC, 50 Hz, 1 min.
5 V supply outgoing remote bus / 7.5 V supply (bus logic)	500 V AC, 50 Hz, 1 min.
7.5 V supply (bus logic) / 24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
24 V supply (I/O) / functional earth ground	500 V AC, 50 Hz, 1 min.

**Error Messages to the Higher-Level Control or Computer System**

None	
------	--


## Ordering Data


Description	Order Designation	Order No.
Terminal with eight digital inputs including connectors and labeling fields	IB IL 24 DI 8-PAC	28 61 24 7
Terminal with eight digital inputs	IB IL 24 DI 8	27 26 22 7
 <div style="background-color: yellow; padding: 5px; border: 1px solid black;">                     Four of the listed connectors or one connector set are/is needed for the complete fitting of the terminal IB IL 24 DI 8.                 </div>		
Connector with eight terminals using the spring-cage method (green, without color print); pack of 10	IB IL SCN-8	27 26 33 7
Connector with eight terminals using the spring-cage method (green, with color print); pack of 10	IB IL SCN-8-CP	27 27 60 8
Connector set with 32 terminals using the spring-cage method (green, without color print)	IB IL DI/DO 8-PLSET	28 60 95 0
Connector set with 32 terminals using the spring-cage method (green, with color print)	IB IL DI/DO 8-PLSET/CP	28 60 96 3
“Configuring and Installing the INTERBUS Inline Product Range” User Manual	IB IL SYS PRO UM E	27 43 04 8



Make sure you are always working with the latest documentation published. It is available on the Internet at [www.phoenixcontact.com](http://www.phoenixcontact.com).

Phoenix Contact GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany

 + 49 - (0) 52 35 - 3-00

 + 49 - (0) 52 35 - 3-4 12 00

 [www.phoenixcontact.com](http://www.phoenixcontact.com)

 Worldwide Locations:  
[www.phoenixcontact.com/salesnetwork](http://www.phoenixcontact.com/salesnetwork)